



PLAN

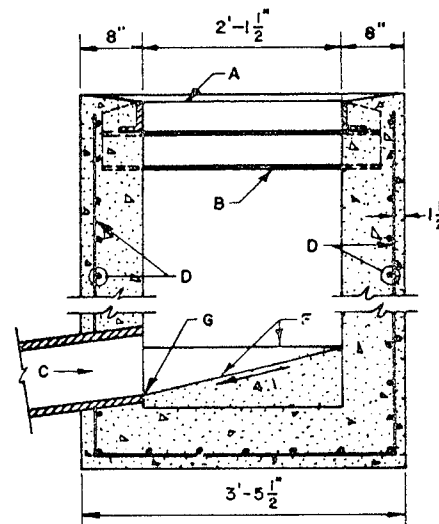

SECTION B-B

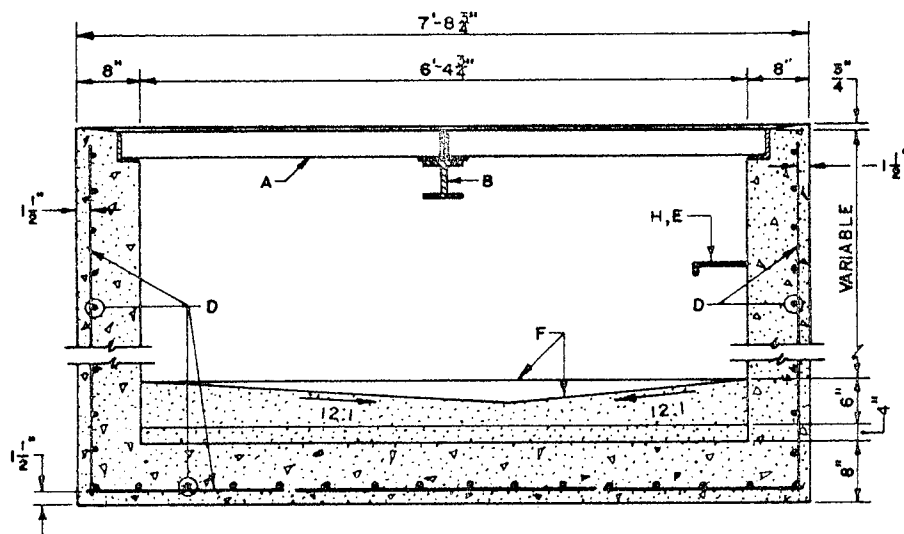

SECTION A-A

### GENERAL NOTES:

1. FOR SINGLE GRATE TYPE STORM INLET, DELETE CENTER SUPPORT AND MOVE ONE END WALL TO FORM NEW SINGLE GRATE INLET.
2. STORM INLET GUTTER TRANSITION WILL BE SHOWN ON THE CONSTRUCTION PLANS.
3. OUTLET PIPE SIZE, PER DESIGN REQUIREMENT.
4. FOR FRAME & GRATING, SEE DWG 2216, 2220 & 2221.
5. FOR CENTER SUPPORT ASSEMBLY, SEE DWG 2215.

### CONSTRUCTION NOTES:

- A. FRAME & GRATE
- B. CENTER SUPPORT ASSEMBLY.
- C. CUT ONE HORIZONTAL AND ONE VERTICAL BAR MAX. AT PIPE OPENING.
- D. NO. 4 BARS A 6" O.C. EACH WAY.
- E. USE STANDARD STEPS, SEE DWG 2229.
- F. CONC. FILL, SEE NOTE C DWG 2201.
- G. INVERT PER DESIGN.
- H. INSTALL STEPS ON DOWNSTREAM FACE

REVISIONS  
12-21-92

CITY OF ALBUQUERQUE

DRAINAGE

STORM INLET DOUBLE "D"

DWG. 2206

AUG. 1986